

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 
Dated 14 November 2003

Patents Form 1/77

Patents Act 1977
(Rule 16)

The Patent Office
THE PATENT OFFICE

24 DEC 1999

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference GBP81626

24 DEC 1999

2. Patent application number
(The Patent Office will fill in this part)

9930693.8

3 Full name, address and postcode of the or of
each applicant (underline all surnames)

BAS Components Limited
Cramptons Road
Sevenoaks
Kent TN14 5DS

763372500

Patents ADP number (if you know it)

If the applicant is a corporate body, give the
country/state of its incorporation

England

4. Title of the invention Feed Head.

5. Name of your agent (if you have one)
"Address for service" in the United Kingdom
to which all correspondence should be sent
(including the postcode)

Marks & Clerk
57 - 60 Lincolns Inn Fields
London WC2A 3LS

Patents ADP number (if you know it)

18001

6. If you are declaring priority from one or more
earlier patent applications, give the country
and the date of filing of the or of each of these
earlier applications and (if you know it) the or
each application number

Country

Priority application No
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise
derived from an earlier UK application,
give the number and the filing date of
the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent
required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Feed Head

The present invention relates to a feed head for receiving nuts which are to be fixed to sheet material in a pressing operation. GB-A-1 474 766 describes a nut which is attached to sheet metal by a pressing operation. The nut has a tubular end which is pressed into an aperture in the sheet metal, deforming the rim of the aperture into a cylinder to embrace the periphery of the nut. The tubular end is turned around the rim to secure the nut against removal, while a flange at the other end of the nut prevents the nut being pushed completely through the aperture. Such nuts are sold by the present applicants under the trade mark FLANGEFORM.

To increase production speeds when attaching the nuts to sheet material, the applicants have developed a feed head for receiving the nuts and feeding them one at a time to a pressing station.

The feed head needs to be robust enough to withstand the forces exerted in a pressing operation; compact enough to fit easily in a press, to be reliable in operation; and to be easily maintained. A particular difficulty occurs when feeding nuts to the pressing station in that the orientation of nuts is not readily controlled. Thus, it is important to be able to gain access to the feed head and pressing station to remove any nuts which are blocking the feed head.

A first aspect of the invention provides a feed head having a delivery path along which nuts are fed to a pressing station in the feed head, the pressing station having a pressing die which is reciprocated transversely to the delivery path under the action of a press to fasten a nut to a sheet metal member, wherein means is provided to reciprocate the pressing die manually.

Preferably the means for reciprocating the pressing die comprises a cam which bears on a surface coupled to the die and is rotated to move the die against the force of a return spring.

By providing for manual operation of the pressing die, the procedure for clearing the feed head of any obstruction, such as a wrongly oriented nut is greatly facilitated.

Preferably, the cam can be used to hold the pressing die in its depressed position. This allows for the press to be operated without operation of the feed head.

Another aspect of the invention provides a feed head having a delivery path along which nuts are fed to a pressing station in the feed head, in which a sensor is provided at the end of the delivery path, at the pressing station, to detect the presence of a nut.

By positioning the sensor at the end of the delivery path, rather than to one side, the feed head can be made narrower at the pressing station, allowing multiple feed heads to be used close together.

Another aspect of the invention provides a feed head having a delivery path along which nuts are fed to a pressing station in the feed head, in which a first sensor is provided at the pressing station and a second sensor is provided up stream of the feed head. By providing the second sensor up stream of the feed head it is possible to detect problems before a nut arrives, or is due to arrive, at the pressing station, which provides for better control.

Another aspect of the invention provides a feed head having a delivery path along which nuts are fed to a pressing station in the feed head, comprising a delivery tube connected to the delivery path for delivering nuts to the delivery path, and an electrical connector for connecting sensors in the feed head to external components, wherein the delivery tube and electrical connector are integrated. Providing a single, integrated connector greatly facilitates connection and disconnection of the feed head to ancillary equipment, the nut feeder and control electronics, allowing for the feed head to be mounted in a space with restricted access.

Other aspects, preferred features and advantages of the invention will be apparent from the following description and the accompanying claims.

In the drawings,

Figure 1 is a cross-section through a feed head forming an embodiment of the invention, along line I-I of Figure 2; and

Figure 2 is an end view of the feed head of Figure 1,

Referring to figure 1, a feed head 2 has a pressing die 4 which is shown in its uppermost position. The die 2 reciprocates in a stationary feed head body 6. The die 2 has a peripheral flange at its upper end held between a collar 8 and a cover plate 10. A hollow cylinder 12 is also held by a flange 13 at its upper end between the cover plate 10 and collar 8. A spring 14 urges the cylinder 12 upwards, and hence the cover plate 10, collar 8 and pressing die 4. A press (not shown) presses down on the cover plate 10 to urge the die 4 downwards against the force of the spring 14.

A delivery path 16 is provided at the bottom of the body 6 and ends at end 18 under the pressing die 4.

Nuts are fed along the delivery path 16 from a delivery tube 20 which in turn is filled from a parts feeder (not shown). As seen in Figure 2, delivery path 16 is trapezium shaped, being wider at the upper part to receive a laterally extending flange of a nut 22, seen in Figure 2, and to maintain the orientation of nuts 22 as they pass along the path 16.

In operation, nuts 22 are urged along the delivery path 16 from the parts feeder. When a nut reaches the end 18 of the delivery path 16 it is sensed by a sensor 24 which sends a signal to the press to indicate that the feed head is ready for a pressing operation. The press bears on the plate 10, to depress the die 4, and hence urge the nut downwards onto the sheet metal part (not shown) to which the nut is to be fixed. A cooperating die (also not shown) sits under the sheet metal part to deform the nut 22 as it penetrates an aperture in the sheet metal part and so secure the nut in place.

Immediately upstream of the pressing die 4 is a locating pin 26. Pin 26 has a nose 28 which serves to locate and centralise or orient the penultimate nut in the delivery path 16. Pin 26 is urged downwards by a spring 30, but held by a cross-pin 32 which extends from the pin 26 and bears on a flange 34 at the bottom of the cylinder 12. As cylinder 12 is lowered (when the press bears on cover plate 10), spring 30 extends to urge the pin 28 downwards.

Further upstream of pin 26 is a second sensor 34 which serves to detect the antepenultimate nut in the delivery path 16.

Sensors 24, 34 are wired to an electrical outlet connector 36 which is located immediately above the inlet end 38 of the delivery path 16.

An integrated connector 40 comprises a complementary electrical connector 42 to mate with a connector 36, and delivery tube 20 which mates with the inlet end 30 of delivery path 16.

Above the connector 36 is a cam 44. Cam 44 has an exposed hexagonal socket 46 and rotates in a circular bore 48 in the body 6. At the other end of the cam 44 is a nose 50 which engages a flange 52 at the bottom end of the cylinder 12. As the cam 44 is manually rotated, by means of a hexagon key inserted in the bore 46, the nose 50 rotates and so urges the cylinder 12 downwards against the force of the spring 14, and hence also pulls the pressing die 4 downwards. It will be appreciated that when the cam 44 is rotated through 180 degrees, the nose 50 reaches the bottom of its travel, and the cam can be temporarily "locked" in this position, for example by a small flat provided on the nose 40 where it engages the flange 52.

In use, the feed head 2 is installed a press, and is connected to a parts feeder and control system via connector 40. Nuts 22 are fed from a parts feeder along delivery tube 20. The parts feeder is controlled by signals from sensors 24, 34 which indicate the presence of nuts in the delivery path 16. The press is sent a "ready" signal when a nut is detected by sensor 24.

In the event of a jam in the delivery path, or elsewhere in the system, the pressing die 4 can be actuated manually, by rotation of cam 44, to eject nuts from the delivery path 16. Also, if it is desired to operate the press without actuation of the feed head pressing die 4, the die 4 can be held in its lowered position by cam 20.

By locating the sensor 24 at the axial end of the delivery path 16, the feed head can be made narrow, as seen in Figure 2. Thus multiple feed heads can be spaced close together.

CLAIMS:

1. A feed head having a delivery path along which nuts are fed to a pressing station in the feed head, the pressing station having a pressing die which is reciprocated transversely to the delivery path under the action of a press to fasten a nut to a sheet metal member, wherein means is provided to reciprocate the pressing die manually.
2. A feed head as claimed in claim 1, wherein the means for reciprocating the die manually is a cam which bears on a surface coupled to the die, and is rotated to move the die against the force of a return spring.
3. A feed head as claimed in claim 2, wherein the cam is rotatable between a first stable position allowing normal operation of the pressing die, and a second stable position holding the die in a depressed position.
4. A feed head having a delivery path along which nuts are fed to a pressing station in the feed head, in which a sensor is provided at the end of the delivery path, at the pressing station, to detect the presence of a nut.
5. A feed head having a delivery path along which nuts are fed to a pressing station in the feed head, in which a first sensor is provided at the pressing station and a second sensor is provided up stream of the feed head.
6. A feed head having a delivery path along which nuts are fed to a pressing station in the feed head, comprising a delivery tube connected to the delivery path for delivering nuts to the delivery path, and an electrical connector for connecting sensors in the feed head to external components, wherein the delivery tube and electrical connector are integrated.

ABSTRACT:**FEED HEAD**

A feed head 2 has a delivery path 16 along which nuts 22 are fed to a pressing station in the feed head 2, the pressing station having a pressing die 4 which is reciprocated transversely to the delivery path 16 under the action of a press to fasten a nut to a sheet metal member. A cam 44 is provided to reciprocate the pressing die 2 manually to facilitate clearance of blockages in the feed head, and also to hold the pressing die in its lowered position to allow operation of the press without operating the die. A sensor 24 for detecting nuts at the pressing station is positioned on the end of the delivery path, enabling a narrower feed head design. A electrical coupling 42 and nut delivery tube 20 are integrated to facilitate connection in confined spaces.

fig 1

1/1

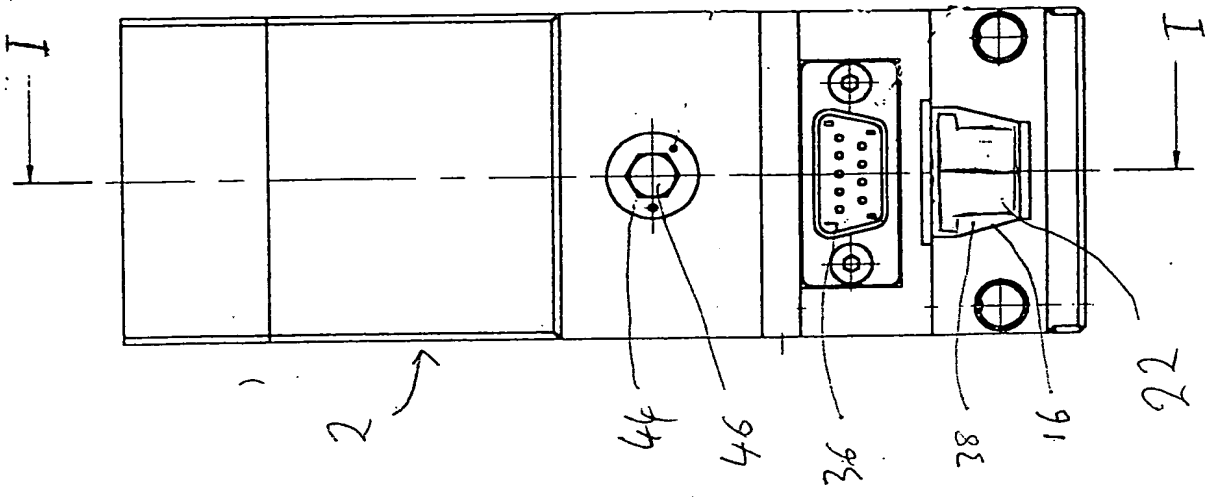


FIG 2

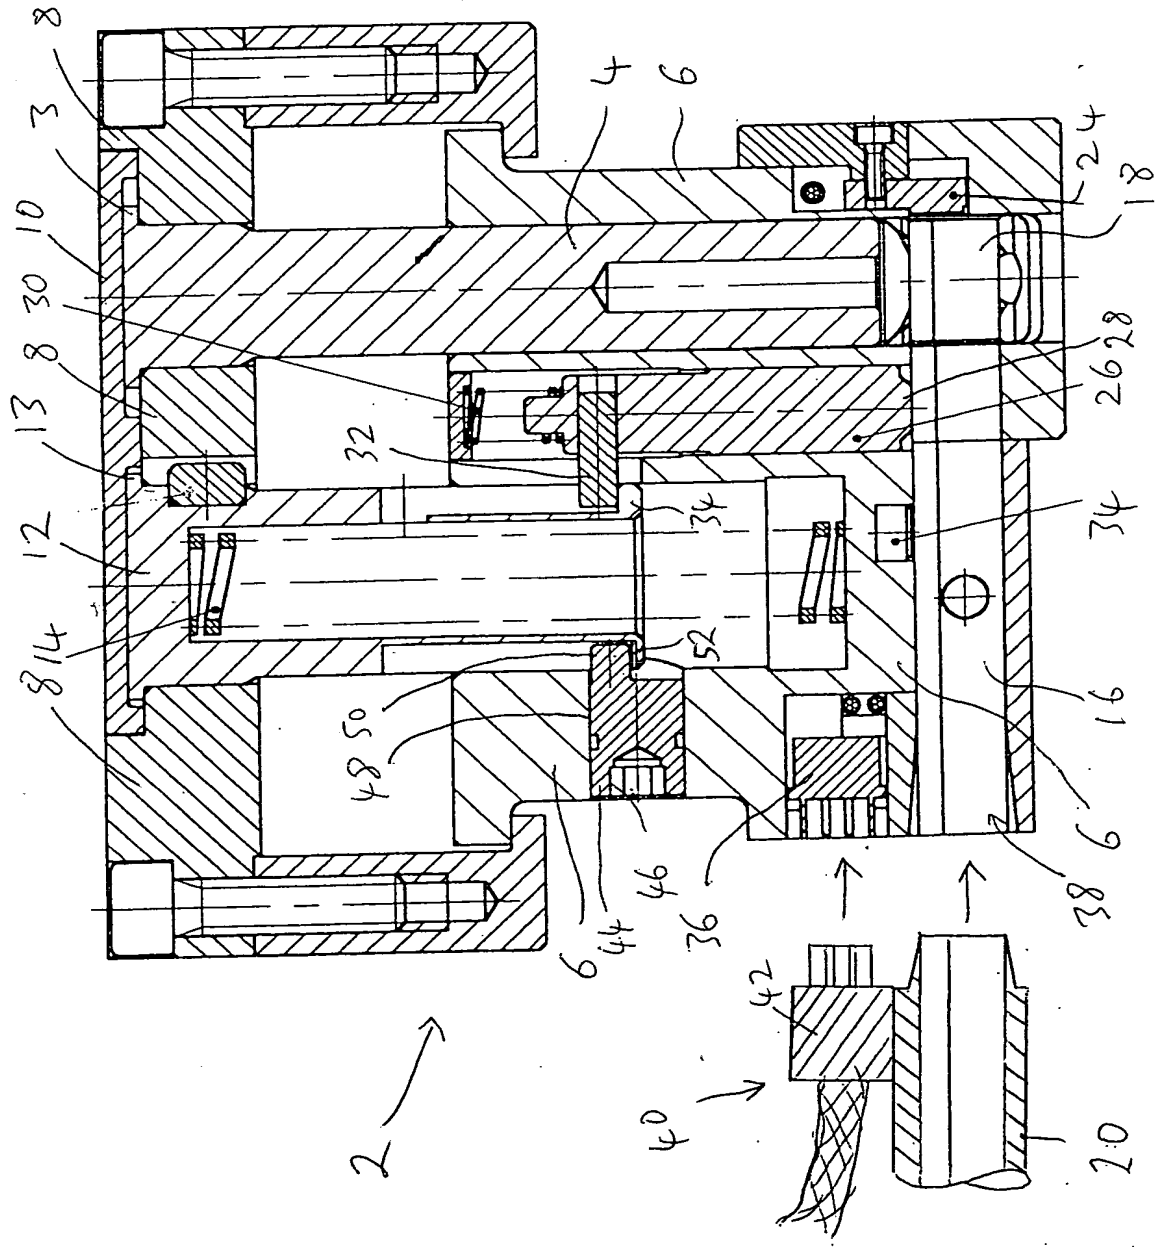


FIG 1